Integra

DRX-3.3

9.2-CHANNEL NETWORK A/V RECEIVER



Engineered to Fit Your Entertainment Dreams

The DRX-3.3 lets you create atmospheres throughout your home with up to three-zone audio distribution and a new quad-core SoC supporting 802.11ac (MIMO) Wi-Fi[®] for network multi-room audio, all with up to 5.2.4 channels of immersive 3D sound for movies and games.

VIDED & AUDIO SUPPORT

- IMAX® Enhanced^{*1} certified for IMAX® digital remasters
- Plays Dolby Atmos® and DTS:X® formats through 5.2.4-ch layouts
- Dolby Atmos Height Virtualization^{*1} technology
- Dolby Surround[®] and DTS[®] Neural:X upmixing technology
- Supports 4K/60p/HDR (HDR10, HLG, Dolby Vision®, BT.2020), 4:4:4, HDCP 2.2
- Zone 2 and Zone 3 speaker outputs with Zone 2 and Zone 3 DACs enable synced
- or independent D/A audio-source distribution (including HDMI/SPDIF'2)
 Connect a hi-fi via Zone 2 pre-/line-out/Zone B line-out to share D/A audio'3 to either or both rooms, or connect a transmitter for wireless headphones
- Built-in phono equalizer (MM) and SACD playback via HDMI[®] (2.8 MHz, 2-ch/multi)
- AccuEQ Advance 9-point room calibration with subwoofer EQ and AccuReflex[™]
- HDMI Sub/Zone 2 output shares media to a projector or second display
- Easy DSP-based Vocal Enhancer clarifies in-program dialog

AMPLIFICATION TECHNOLOGY

- 90 W per channel (8 ohms, 20 Hz-20 kHz, 0.08% THD, 2-ch driven, FTC)
- · Low-impedance amp system with 4-ohm speaker-driving capability
- · Massive custom transformer and hand-selected audio-tuned parts
- Non-phase-shift amp-circuit topology for clear and cohesive sound
- High-precision 384 kHz/32-bit D/A conversion (AKM AK4458)
- VLSC[™] (Vector Linear Shaping Circuitry) filtering technology (Front L/R)
- Front L/R speaker bi-amping capability in 5.2/7.2/5.2.2-ch configuration

NETWORK FEATURES AND MULTI-ZONE AUDIO

- \bullet Quad-core SoC (System on a Chip) supports high-speed 802.11ac (2x2 MIMO)'4 Wi-Fi^{\otimes} specification
- Supports Amazon Music, Spotify®, TIDAL, TuneIn, Pandora®, and Deezer*5
- Works with Sonos certified for the Sonos Home Sound System^{*6}
- Chromecast built-in*7 and voice control with the Google Assistant*8
- \bullet AirPlay 2 multi-room audio and voice control with $\text{Siri}^{\circledast^{\ast}9}$
- DTS Play-Fi[®] multi-room audio via Integra Music Control App*10
- FlareConnect ${}^{{}^{\!\!\mathsf{TM}^*\!1\!1}}$ multi-zone audio with compatible components
- Supports Integra Remote control and music streaming app^{*10}
- Hi-Res Audio playback via network (DSD 11.2 MHz/5.6 MHz/2.8 MHz*12; FLAC, WAV [RIFF], AIFF, and ALAC to 192 kHz/24-bit*13)

AUDIO-VIDEO CONNECTIONS

- 7 HDMI inputs (1 front), Main output (ARC), Sub/Zone 2 output
- 2 digital audio inputs (1 optical and 1 gold-plated coaxial, assignable)
- 7 gold-plated analog audio inputs (1 front)
- Gold-plated phono input (MM) for turntable connection

- USB input (5 V/1 A) for audio playback
- 1/8" (3.5 mm) AccuEQ Advance setup mic input (front)
- 3 gold-plated composite video inputs (1 front)
- 1 gold-plated component video input (assignable)
- Gold-plated quarter-inch headphone jack
- 9 gold-plated banana-plug-ready speaker posts with transparent knobs
- Gold-plated Zone 2 pre-/line-out, Zone B line-level output (analog RCA)
- 2 subwoofer pre-outs
- Bi-directional Ethernet LAN terminal supporting IP Control

CUSTOM INTEGRATION FEATURES

- RS-232 input for external control and automation
- 2 IR inputs and 1 output
- Programmable 12 V trigger-outs with adjustable delay (A: 100 mA, B: 25 mA, C: 25 mA)
- Dealer-settings memory storage and recall function
- Thick detachable IEC power cable
- Optional rack-mount kit (IRK-155-3D)

ADDITIONAL FEATURES

- Aluminum faceplate and volume control
- Stereo Assign Mode supports Height-channel playback
- Volume memory-presets for A/V inputs via front panel
- Bluetooth® Version 4.2 (Profile: A2DP v1.2, AVRCP v1.3)
- Advanced Music Optimizer[™] improves quality of compressed audio
- High-definition GUI over HDMI featuring source input/output data display
- Super Resolution 1080p to 4K video upscaling via HDMI
- Independent tone controls for all channels (including Zone 2)
- Sleep timer, HDMI passthrough, and network standby
- 40 FM/AM/internet radio presets with station-naming (10 characters)
- A/V Sync Control (Up to 500 ms in 1 ms Steps at 48 kHz)
- Crossover Adjustment (40/45/50/55/60/70/80/90/100/110/120/130/150/180/200 Hz)
- 3-Mode display dimmer (Normal/Dim/Dimmer)


*1 Enabled with a future firmware update. *2 Zone 2 HDMI audio is available on inputs 1–3. SPDIF and HDMI support PCM signals only. Zone 3 supports analog/INETRibuetoth. Simultaneous playback of multiple audio sources is enabled in Main, Zone 2, and Zone 3. Output via Zone 2 speaker output and Zone 2/Zone B line-out enabled. *3 When set to Zone B, encoded and PCM audio playback for all inputs is enabled in Main, and Zone B. *4 Some countries or regions have regulations that affect wireless signal strength and we use of Wi-Fi channels. *6 Service availability varies with region, and a paid subscription may be required to access some or all features. *6 Requires a Sones Connect (sold separately). Sonos Music Control App is available free for iPhone*, iPad*, and Android** devices. Please check device and OS requirements before download and installation. *7 The unit may automatically download and apply an Over-the-Air software update during setup. *8 Voice control requires a somar speaker featuring the Google Assistant. *9 Voice control with Sir requires an Apple HomePod*. *10 Available free for iPhone, i14, and Android** download and installation. *11 FlareConnect is a proprietary network protocol that shares audio between compatibile products. For details on product compatibility, please visit the Integra website. *12 Converted to PCM. Playback not guaranteed via wireless LAN. *13 Supported sampling rates may vary depending on network environment. ALAC is supported to a maximum 96 KHz.

INSPIRED BY PASSION - DRIVEN BY EXCELLENCE

Integra

DRX-3.3

9.2-CHANNEL NETWORK A/V RECEIVER

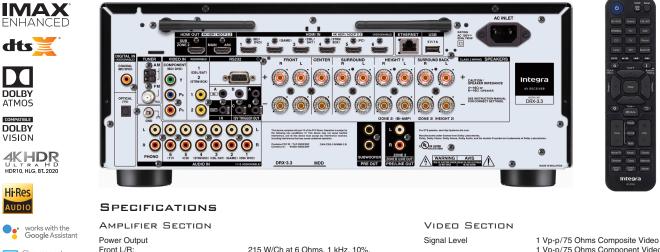

Chromecast built-in 384^{kHz}32^{bit}

DOLBY

ATMOS DOLBY

VISION

Hi-Res AUDIO

AccuEQ ADVANCE

Dynamic Power:

Phono Overload:

Tone Control:

Frequency Response:

Signal-to-Noise Ratio:

Speaker Impedance:

0

88

-0---

[2.09]

Input Sensitivity and Impedance:

Rated RCA Output Level and Impedance:

[14.63] 371.5 [10.04] 255

[10.43] 266

88

000000000000

[12.09] 307 [17.13] 435









🚯 Bluetooth pandora

TIDAL

DEEZER

Spotify







Due to a policy of continuous product improvement, Integra reserves the right to change specifications and appearance without notice. Dolby, Dolby Atmos, Dolby Surround, Dolby Vision, and the double-D symbol are trademarks of Dolby Laboratories. For DTS patents, see http://patents.dts.com. Manufactured under license from DTS Licensing Limited. DTS, the Symbol, DTS and the Symbol together, DTS:X and the DTS:X logo, DTS neuralX and the DTS NeuralX. Nogo, and Play-FT and the Play-FT logo are registered trademarks or trademarks of trademarks of trademarks of MAN factored. Manufactured under license from DTS Licensing Limited. DTS, the Symbol Regreter, DTS:X and the DTS:X logo, DTS registered trademarks of the Spotify Group, registered trademarks of the Spotify and the Spotify and the Spotify logo are trademarks of the Spotify Group, registered trademarks of trademarks of the Spotify cances, the Hi-Res Audio logo contron to the Hi-Res Audio logo control to the Hi-Res Audio logo, and the PantOra Haudis. Origina Mating Society, The Hi-Res Audio logo is used under license from Japan Audio Society, PANDORA, the PANDORA logo, and the Pandora trade dress are trademarks of Amazon.com, Inc. or its affiliates.

215 W/Ch at 6 Ohms, 1 kHz, 10%, 1 Channel Driven, 90 W/Ch at 8 Ohms, 20 Hz-20 kHz, 0.08%, 2 Channels Driven, FTC 240 W (3 Ohms, Front) 210 W (4 Ohms, Front) 120 W (8 Ohms, Front) 200 mV rms/47 k-Ohms (Line/Unbalance) 3.5 mV rms/47 k-Ohms (Phono MM) THD+N (Total Harmonic Distortion + Noise) : 0.08% (20 Hz-20 kHz, Half Power) 1 V rms/470 Ohms (Subwoofer Pre-out) 200 mV rms/470 Ohms (Zone 2 Pre-/Line-out/Zone B Line-out) 70 mV (MM 1 kHz, 0.5 %) 10 Hz-100 kHz/+1 dB, -3 dB (Direct Mode) ±10 dB, 20 Hz (Bass) ±10 dB, 20 kHz (Treble) 106 dB (IHF-A, LINE) 80 dB (IHF-A, PHONO) 4 Ohms-16 Ohms

[4.59] 116.5

000

[2.09]

[2.81] 71.5

9.22] 234.3

166.7

[6.56]

155 [6.85] 174

[6.10]

[2.43] 61.7

(Θ)

0

TUNER SECTION Tuning Frequency Range: FM/AM Preset Memory:

GENERAL Power Supply: Power Consumption: Stand-by Power Consumption: 0.15 W Dimensions (W x H x D):

Weight: CARTON


Dimensions (W x H x D): Weight:

1 Vp-p/75 Ohms Component Video (Y) 0.7 Vp-p/75 Ohms Component Video (Pb/Pr)

FM 87 5 MHz-107 9 MHz AM 530 kHz-1,710 kHz 40 Stations

AC 120 V~, 60 Hz 740 W 17 ¹/₈″ x 6 ⁷/₈″ x 14 ¹³/₁₆ (435 x 174 x 376.5 mm) 23.4 lbs. (10.6 kg)

22 ¹/₁₆" x 12" x 18 ³/₈" (560 x 305 x 467 mm) 29.8 lbs. (13.5 kg)

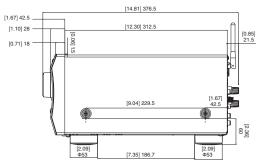

INSPIRED BY PASSION - DRIVEN BY EXCELLENCE www.integrahometheater.com